



SPECIAL VACUUM CUP HOLDERS WITH MALE AND FEMALE THREADED CONNECTORS



The actual springing stroke is:

- For height C= 55 mm 37 mm
- For height C= 110 mm 84 mm

Special vacuum cup holders with male threaded connectors

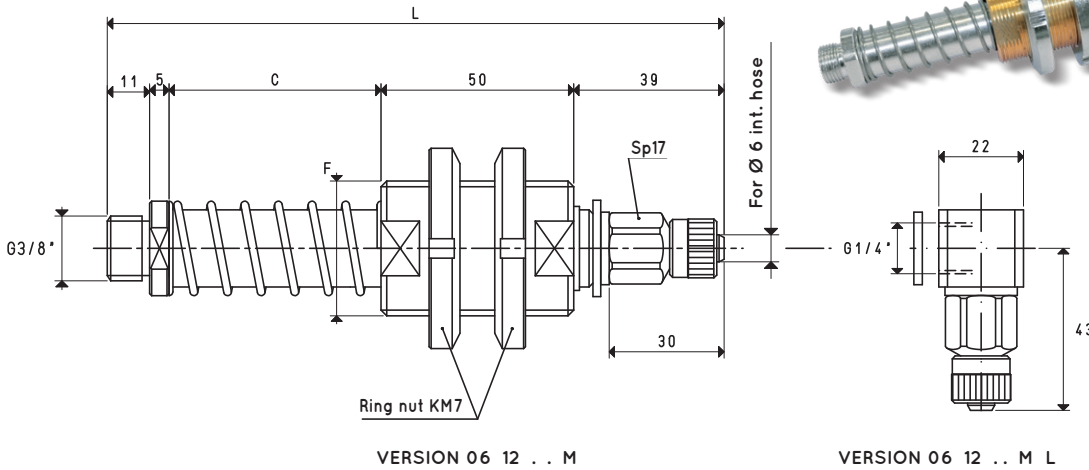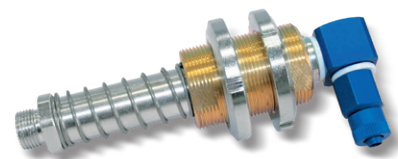

VERSION 06 12 . . M




VERSION 06 12 .. M L

VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 6 X 8

| Item | * C | F Ø | L | Weight Kg |
|--------------------|-----|-----------|-----|--------------|
| 06 12 55 M | 55 | M35 x 1.5 | 160 | 0.63 |
| 06 12 110 M | 110 | M35 x 1.5 | 215 | 0.77 |

Note: To order vacuum cup holders with L fittings, add the letter L to the code.

Special vacuum cup holders with female threaded connectors

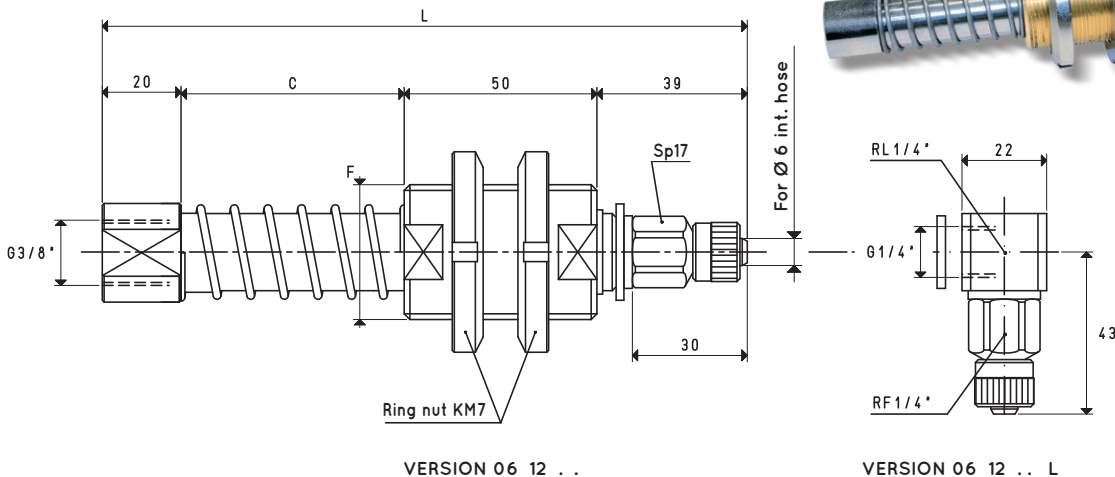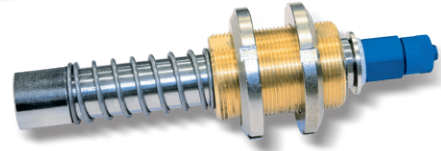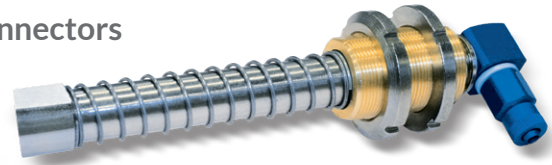

VERSION 06 12 . .

VERSION 06 12 .. L

VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 6 X 8

| Item | * C | F Ø | L | Weight Kg |
|------------------|-----|-----------|-----|--------------|
| 06 12 55 | 55 | M35 x 1.5 | 164 | 0.62 |
| 06 12 110 | 110 | M35 x 1.5 | 219 | 0.75 |

Note: To order vacuum cup holders with L fittings, add the letter L to the code.




Transformation ratio: N (newton) = Kg x 9.81 (force of gravity) inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$



SPECIAL VACUUM CUP HOLDERS WITH MALE THREADED CONNECTORS

The actual springing stroke is:



- For height C= 55 mm 37 mm
- For height C= 110 mm 84 mm

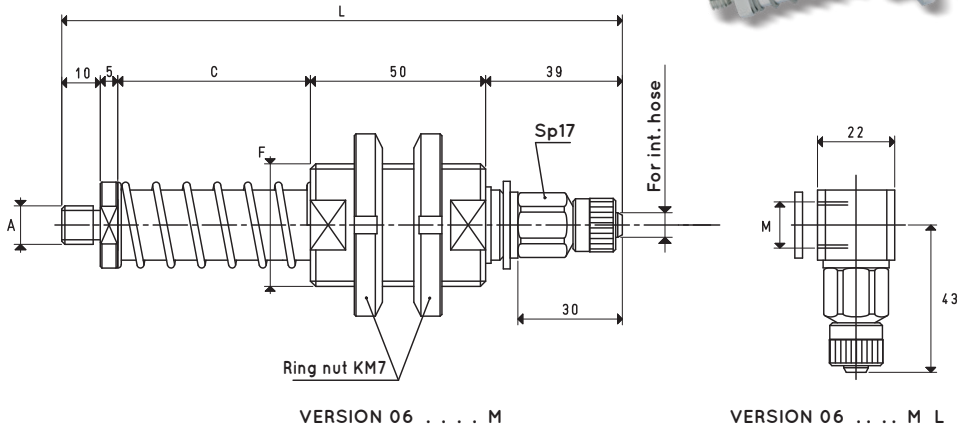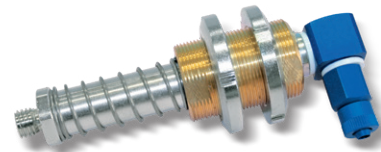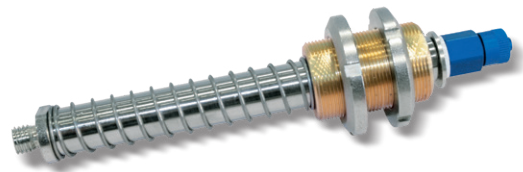

VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE

| Item | A | * C | F Ø | L | M | Int. hose Ø | Weight Kg |
|--------------------|-------|-----|-----------|-----|-------|----------------|--------------|
| 06 11 55 M | M12 | 55 | M35 x 1.5 | 159 | G1/4" | 6 | 0.63 |
| 06 11 110 M | M12 | 110 | M35 x 1.5 | 214 | G1/4" | 6 | 0.77 |
| 06 13 55 M | G1/2" | 55 | M35 x 1.5 | 159 | G3/8" | 9 | 0.63 |
| 06 13 110 M | G1/2" | 110 | M35 x 1.5 | 214 | G3/8" | 9 | 0.77 |

Note: To order vacuum cup holders with L fittings, add the letter L to the code.

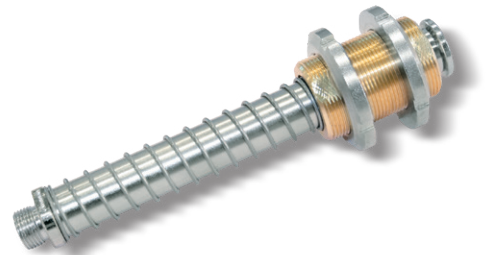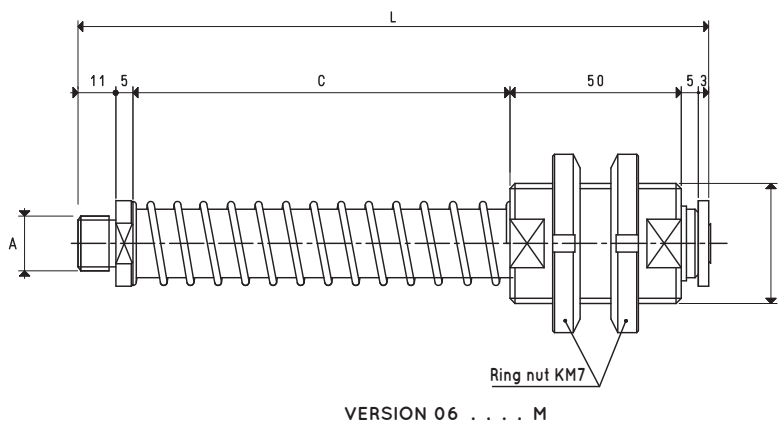

| Item | A | * C | F Ø | L | Weight Kg |
|--------------------|-----|-----|-----------|-----|--------------|
| 06 14 55 M | M16 | 55 | M35 x 1.5 | 129 | 0.52 |
| 06 14 110 M | M16 | 110 | M35 x 1.5 | 184 | 0.65 |
| 06 15 55 M | M12 | 55 | M35 x 1.5 | 129 | 0.52 |
| 06 15 110 M | M12 | 110 | M35 x 1.5 | 184 | 0.65 |

Note: The vacuum cup holder is not equipped with an axial vacuum passage

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity) inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$